

A GLOBAL FAMILY OF BRANDS

SCHWAB

Fluidmaster WC Frame PrimaFlo

Dry Wall Installation Element For Wall Hung WC Pan

Installation method

- Installation in prefabricated walls or studded walls,
- Pre-wall installation in dry walls,
- Universal installation into solid walls.

Properties

• Self-supporting, green powder coated frame, square profile 30x30 mm,

- 400 kg load tested frame,
- Enables installation of wall hung WC pans with dimension of 180 mm or 230 mm,
- Wall brackets included
- Adjustable supporting feet (0-200 mm),
- Pre-assembled concealed cistern, with front mechanical actuation,
- Installed factory pre-set dual flush valve, large flush 4 L, small flush 2 L,
- Concealed cistern is fully insulated against condensation,
- Water supply connection possibility on the three positions,
- Maintenance service work is possible without using any tools.

Special feature

- Quiet mechanical fill valve Fluidmaster 747 Series (Noise class 1 ISO 3822),
- Fill valve flow pressure 0,2 10 bar
- Depth adjustable drain elbow (+/-20 mm).

Product contains

- Concealed cistern is equipped with pre-installed stop valve top middle,
- Water supply connection G 1/2 with flexible hose,
- PE-HD drain elbow Ø 90 / 90 mm with seal,
- Eccentric PE-HD adapter Ø 90 / 110 mm with seal,
- Installation manual,
- Complete installation and fixing material.

Dimension of the product

• Depth 125 mm, width 500 mm, height 1180 mm

Information

- Quantity packaging / pallet: 1 / 20 pcs
- Warranty: more information in General terms and conditions

Available flush plates, accessories has to be ordered separately

Product Data Sheet

SKU code: 2022F-0003-30 **EAN code:** 8681282661046










A GLOBAL FAMILY OF BRANDS

WISA CHWAB

FLUSH PLATES

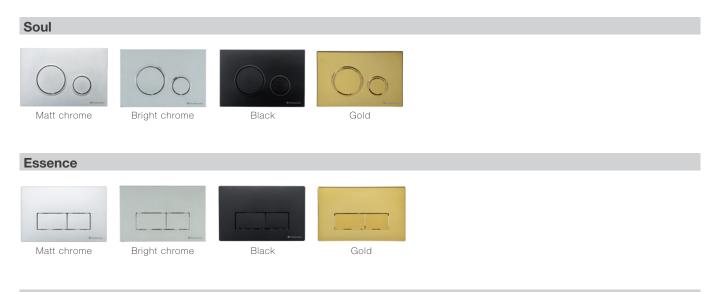

Vitality



