

Fluidmaster WC Frame NexaFlo

Dry Wall Installation Element For Wall Hung WC Pan

Product Data Sheet

SKU code: 2040F-0001-30

EAN code: 8681282661022

Installation method

- Installation in prefabricated walls or studded walls,
- Pre-wall installation in dry walls,
- Universal installation into solid walls.



Properties

- Self-supporting, green powder coated frame, square profile 40x40 mm,
- 400 kg load tested frame,
- Enables installation of wall hung WC pans with dimension of 180 mm or 230 mm,
- Pre-assembled wall brackets,
- Adjustable supporting feet (0-200 mm),
- Pre-assembled concealed cistern, with front electronic or mechanical actuation,
- Installed factory pre-set dual flush valve, large flush 4 L, small flush 2 L,
- Concealed cistern is fully insulated against condensation,
- Water supply connection possibility on the four positions,
- Maintenance service work is possible without using any tools.



Special feature

- Quiet mechanical fill valve Fluidmaster 747 Series (Noise class 1 ISO 3822),
- Fill valve flow pressure 0,2 - 10 bar
- Depth adjustable drain elbow (+/-20 mm),
- Corner installation is possible with additional wall bracket kit (has to be ordered separately).

Product contains

- Concealed cistern is equipped with pre-installed stop valve – top middle,
- Water supply connection G 1/2 with flexible hose,
- PE-HD drain elbow Ø 90 / 90 mm with seal,
- Eccentric PE-HD adapter Ø 90 / 110 mm with seal,
- Installation manual,
- Complete installation and fixing material.




Dimension of the product

- Width 380 mm, height 1180 mm, depth 140 mm

Information

- Quantity – packaging / pallet: 1 / 28 pcs
- Warranty: more information in General terms and conditions

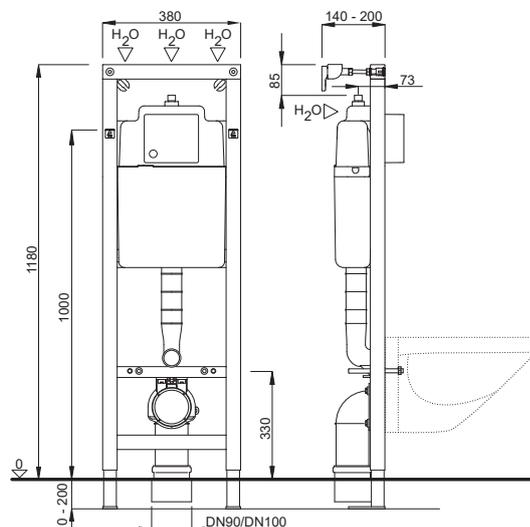

Available flush plates, accessories has to be ordered separately

FLUSH PLATES

Balance IR TECH



White

GLASS
WhiteGLASS
BlackSTEEL DESIGN
Stainless steel

Harmony



Matt chrome



Bright chrome



Black

STEEL DESIGN
Stainless steelALU
BlackALU
White

Wall bracket kit

